

7IZ10-30/QX156-T/T LC Diplexer

◆Features:

- Power Capabilities: 80 watts @ 108 to 156 MHz
40 watts @ 30 to 88 MHz
- TNC Female Connectors


◆Specifications:

Insertion Loss		Dimensions:	6.0" x 3.0" x 2.0"
1.0 dB:	@ 30 to 88 MHz & 108 to 156 MHz	Shock:	20 G's, 1/2 Sine, 11 Ms
VSWR		Vibration:	10 G's, 10 Hz to 2000 Hz
1.5:1:	@ 30 to 88 MHz	Temperature:	-55°C to +85°C
1.5:1:	@ 108 to 156 MHz	Relative Humidity:	0 to 95%
Stopbands			
40 dB:	@ 30 to 88 MHz & 108 to 156 MHz		




◆Applications:

- Broadcasting
- Aeronautical Navigation

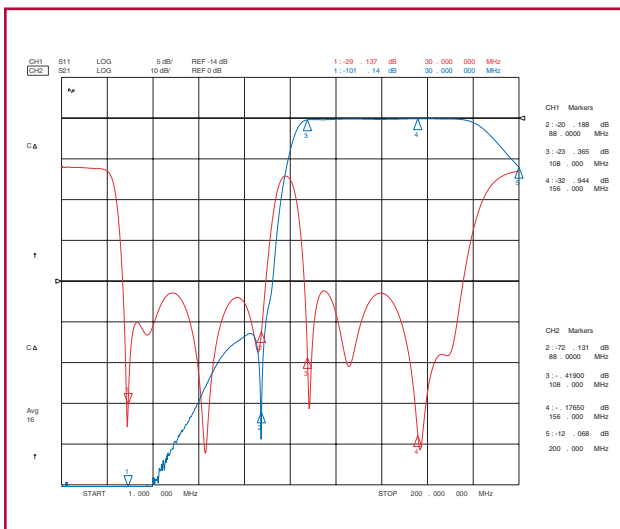

Highside 108 MHz to 156 MHz

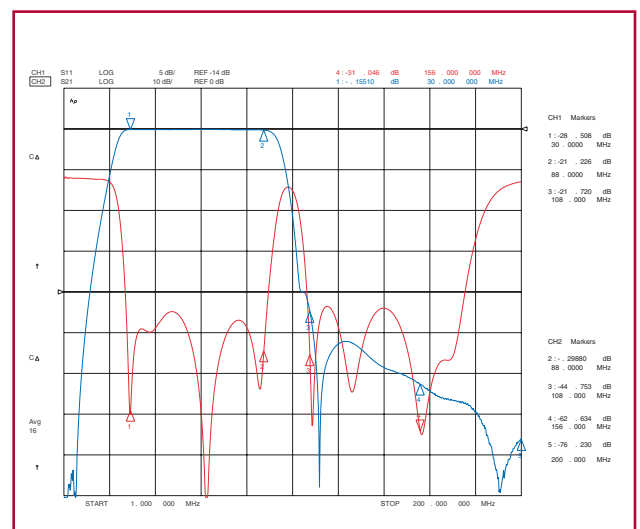

Lowside 30 MHz to 88 MHz



Deutschland
Telemeter Electronic GmbH
Joseph-Gänsler-Straße 10
D-86609 Donauwörth
Telefon (09 06) 7 06 93-0
Telefax (09 06) 7 06 93-50
E-Mail info@telemeter.de
www.telemeter.info

Schweiz
Telemeter Electronic GmbH
Romanshornstrasse 117
CH-8280 Kreuzlingen
Telefon (071) 699 20 20
Telefax (071) 699 20 24
E-Mail info@telemeter.ch
www.telemeter.info

